
EDGESTONE SCUPPER

Assembly & Installation Instructions



NOTE: the Edgestone Scupper, Bubbler/Planter and Double Bubbler are decorative rock products. These faux rock products are not designed for sitting, standing, jumping or diving. These products share a universal base and each have their own distinctive top piece, as shown.

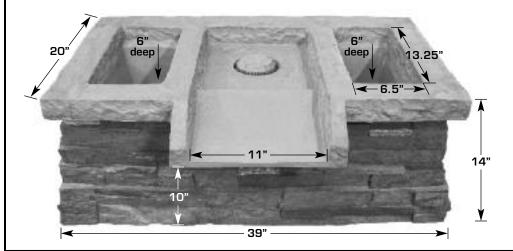

1. Position waterfall 3" back and parallel with the pool wall.



2. Mark position for water stub-up, minimum of 6" maximum of 20" from pool wall. Maximum 6" tall.



3. Once stub-up is installed, place Scupper over the stub-up and reposition to pool wall. Using 3/16" masonry bit and hammer drill, use the four provided locations as guides to drill holes for mounting screws. Screw in the provided blue Tapcon screws... tighten securely but do not over tighten.



4. Plumb waterfall to stub-up using PVC glue (not included). We recommend that from the stub-up to the provided 1" female fitting, that flex PVC hose and a union be utilized (not included). Include an extra length of flex PVC curled up inside the waterfall so the Scupper can be drained or removed for the winter. The top of waterfall just snaps into position on top of the base.



8 0 0 . 7 3 7 . 5 3 8 6 3050 S. ALVERNON WAY • TUCSON, AZ 85713

EDGESTONE BUBBLER/PLANTER & DOUBLE BUBBLER Assembly Guide

