

PAVER KIT INFO – SELECTED DIVING PRODUCTS

When installing an Inter-Fab diving board and base set up using a paver kit, you must ensure that all standard requirements for a diving board and base installation are met. The diving board and base set up must be compatible with the type of pool on the intended installation and all ANSI/APSP/ICC-5 2011 requirements must be met.

Figure 1 illustrates the standard minimum concrete pad recommended for all Inter-Fab diving board and base set ups, which is 4' wide x 8' long x 6" deep.

Figure 2 shows an example side view of a paver jig used in a paver installation. Pavers can be a maximum of 3" thick. Pavers must be mechanically attached to the concrete pad using a setting material (such as mortar or thinset for example) that is no thicker than 3/8".

Refer to Figure 3 to determine how much of the jig needs to be exposed above the final deck surface. You will need to factor in the thickness of your paver (3" MAX.) and the thickness of your setting material (3/8" MAX.) for your individual installation.

Inter-Fab Inc. will not be responsible for damage to pavers caused by drilling or mechanically attaching to concrete pad. Refer to paver manufacturer's specific installation instructions before beginning.

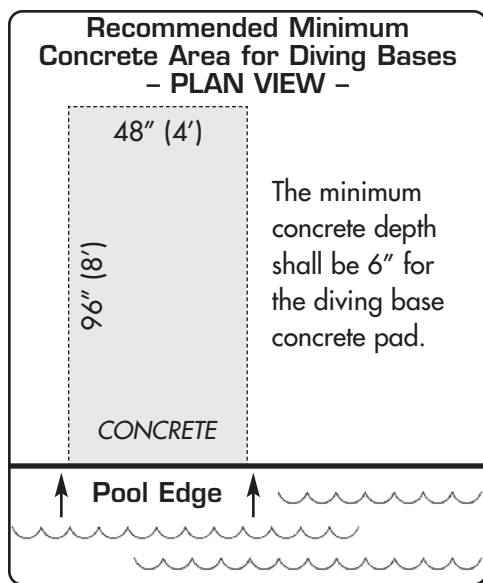


Fig. 1

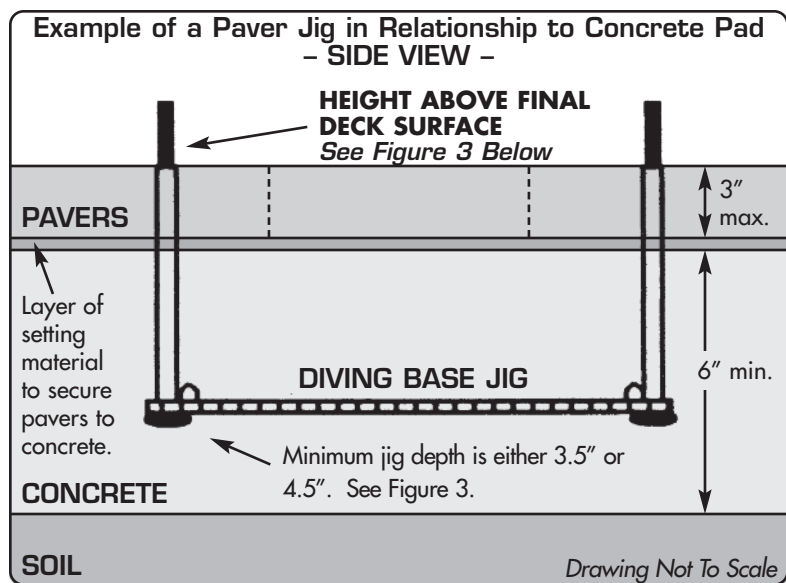


Fig. 2

| INTER-FAB DIVING BASE | MIN. JIG DEPTH | PAVER JIG PART NUMBER | PAVER JIG BOLTS | HEIGHT ABOVE FINAL DECK SURFACE |
|---------------------------------|----------------|-----------------------|------------------------|---------------------------------|
| LA MESA BASE / LOS ARCOS BASE | 3.5" | LM-J6 PAVER | 1/2" X 8" Carriage SS | 1.5" |
| – WITH 8' JIG | 3.5" | LM-J8 PAVER | 1/2" X 8" Carriage SS | 1.5" |
| – WITH 10' JIG | 3.5" | LM-J10 PAVER | 1/2" X 8" Carriage SS | 1.5" |
| DURO-SPRING BASE | 4.5" | DS-J PAVER | 5/8" X 10" Hex Head SS | 1.5" |
| TECHNI-SPRING STEEL / EDGE BASE | 4.5" | TS-EDGE-J PAVER | 1/2" X 10" Hex Head SS | 1.5" |
| TECHNI-SPRING FIBERGLASS BASE | 4.5" | TSF-J PAVER | 1/2" X 12" Hex Head SS | 3.5" |
| BAJA BASE | 4.5" | BA-J6 PAVER | 1/2" X 10" Hex Head SS | 1.5" |
| – WITH 8' JIG | 4.5" | BA-J8 PAVER | 1/2" X 10" Hex Head SS | 1.5" |
| CITY BASE | 3.5" | CITY-J6 PAVER | 1/2" X 8" Carriage SS | 1.5" |
| T7-N BASE (3 BOLT JIG) | 4.5" | T7-NJIG PAVER | 1/2" X 10" Hex Head SS | 2.0" |

Fig. 3